

HIGH TEMPERATURE AIR MOVERS

The XPOWER X-35AR axial fan is designed for high temperature work environs up to 80°C. Use this unit in conjunction with high temperature heaters to circulate hot air for thorough pest control, water damage restoration, and more. This high performance fan features a high torque, sealed motor, variable speed control, and a low 0.5 Amp draw for a focused, powerful air flow up to 20m. The feature-laden X-35AR Axial Fan is both lightweight and stackable with an included 360-degree rotational rack/stand. A built in daisy chain power outlet can help speed up the drying process when time is crucial, especially on challenging pest control, restoration and remediation jobs.



Why XPOWER products:

- Designed for high temperature work environs up to 80°C
- Great for pest control and water damage restoration applications
- Features a SEALED Motor to Protect it from Contaminants and Water Damage
- Low 0.5 Amps Draw with 1520 CFM(2600M³/H) Max. Airflow Capacity
- Rack/stand Included Allowing 360-Degree Rotation
- Lightweight & Stackable up to 5 units high for Easy Storage



BED BUG CONTROL the Red Hot Opportunity

Building service contractors, property management agencies, as well as independent hotel/motel owners are pairing XPOWER Heat Resistant Axial Fans with heating equipment designed specifically for bed bug remediation for optimum result.

**HI-TEMP
RESISTANT**


80°C

**SEALED
MOTOR**
To Resist Corrosion


**3-HOUR
TIMER**
Set & Forget




AIRFLOW DIAGRAMS




External roto-motor and front grill design creates focused airflow that travels up to 40m.



Bounce the air off walls and let it reach every corner.



Constantly recirculates air to create a gentle and consistent stream of airflow to shorten drying time.

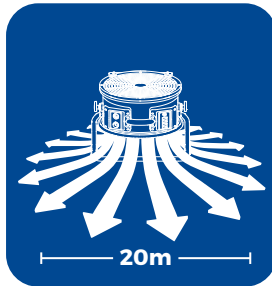

Point it downward to dry area around the fan up to 20m.

FEATURES



Built in Power Outlet

360° Rotation



Stackable



Adjustable Rack



Auxiliary Outlet with Circuit Breaker for Daisy Chain






Variable Speed Control Switch

Sealed Motor that Produces Efficient, Powerful and Quiet Airflow

Quick Release Knob for Easy Angle Adjustment

Specially Designed Air Fin Guide for More Focused & Extended Airflow Range Up to 40m

Durable ABS or ABS+PC Housing Design

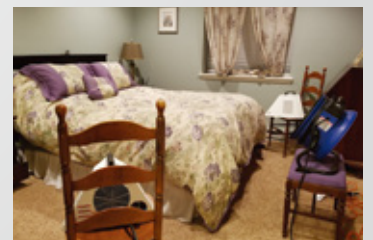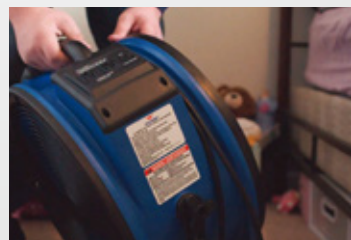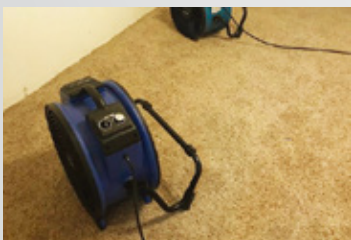

Model	Volt & Cycle	Power	Amps	Rated Airflow	Weight(N.W.)	Dimension(L x W x H)
X-35AR	220-240V~.50Hz	115W	0.5A	2600m ³ /h	7.0kg	47.2x48.8x23.9cm